


# OPTI

## Net cooling capacity at 32°C ambient temperature

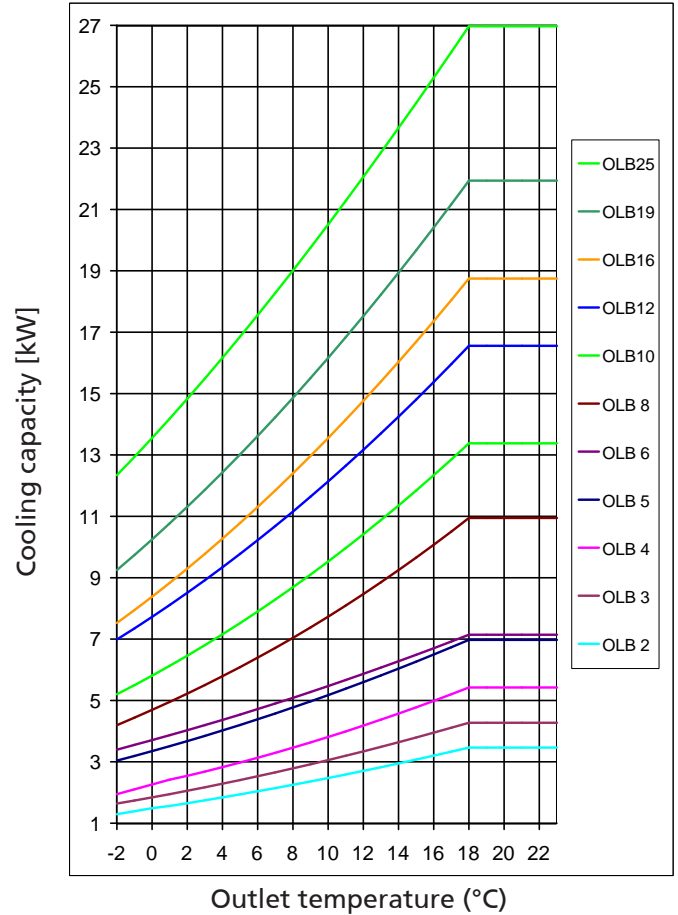

The water chillers of the range **OPTI** are complete ready mounted, factory tested units for cooling liquids, including pumps, tanks, regulators and all optionals according to your specification.


Self contained housing in galvanised steel, powder finished, norm – switch – box, silent version, approx. 65 dB(A) in about 5m distance. CE- sign.

Refrigerants CFC free.

### Typekey:

- OLB 4 N**
- = Normal, Tropic, Energie- Saving- System,...
- = Q0 at 10°C outlet temperature and 32°C ambient temperature
- = Refrigerant: B=R134a, C=R407C, D=R404a
- = L: aircooled, W:watercooled, WT: heat exchanger
- = Type: OPTI, KOMPAKT, BLOCK, SPEZIAL

### Cooling principle

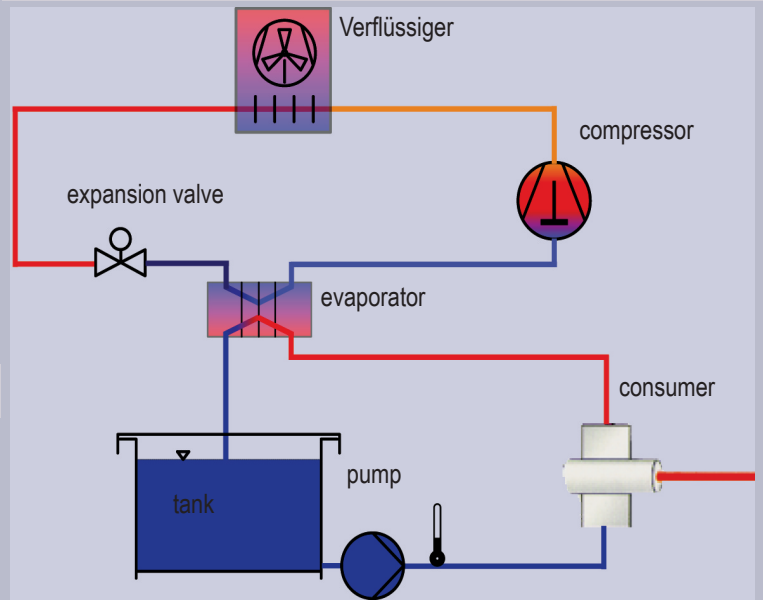

### Technical data:

Industrial Cooler Typ	OLB 2	OLB 3	OLB 4	OLB 5	OLB 6	OLB 8	OLB 10	OLB 12	OLB 16	OLB 19	OLB 25
water connection	RP 3/4"		RP 3/4"			RP 1"			RP 1 1/4"		
air flow rate [m3/h]	900		2.500			5.500			8.000		
length [mm]	680		810			1110			1200		
depth [mm]	480		600			800			810		
height [mm]	942		1062			1450			1750		
weight approx. [kg]	75		140			230			320		

technical data subject to change

Certificate acc. to DIN-ISO 9001

Version E:02 vom 12.03.05 GT

**KKT-KRAUS INDUSTRIEKÜHLUNG GmbH**  
 Mühlach 13a •  
 D-90552 Röthenbach  
 ☎: +49(0)911 – 95333 – 0 • 📠: - 33  
 e-mail: [industriekuehlung@kkt-kraus.com](mailto:industriekuehlung@kkt-kraus.com)  
[www.ik-kraus.com](http://www.ik-kraus.com)